


EASYBOX[®]

Built-in module



The new EASY-Box

Ideal Standard leads the way with built-in advanced technology for all installation possibilities.

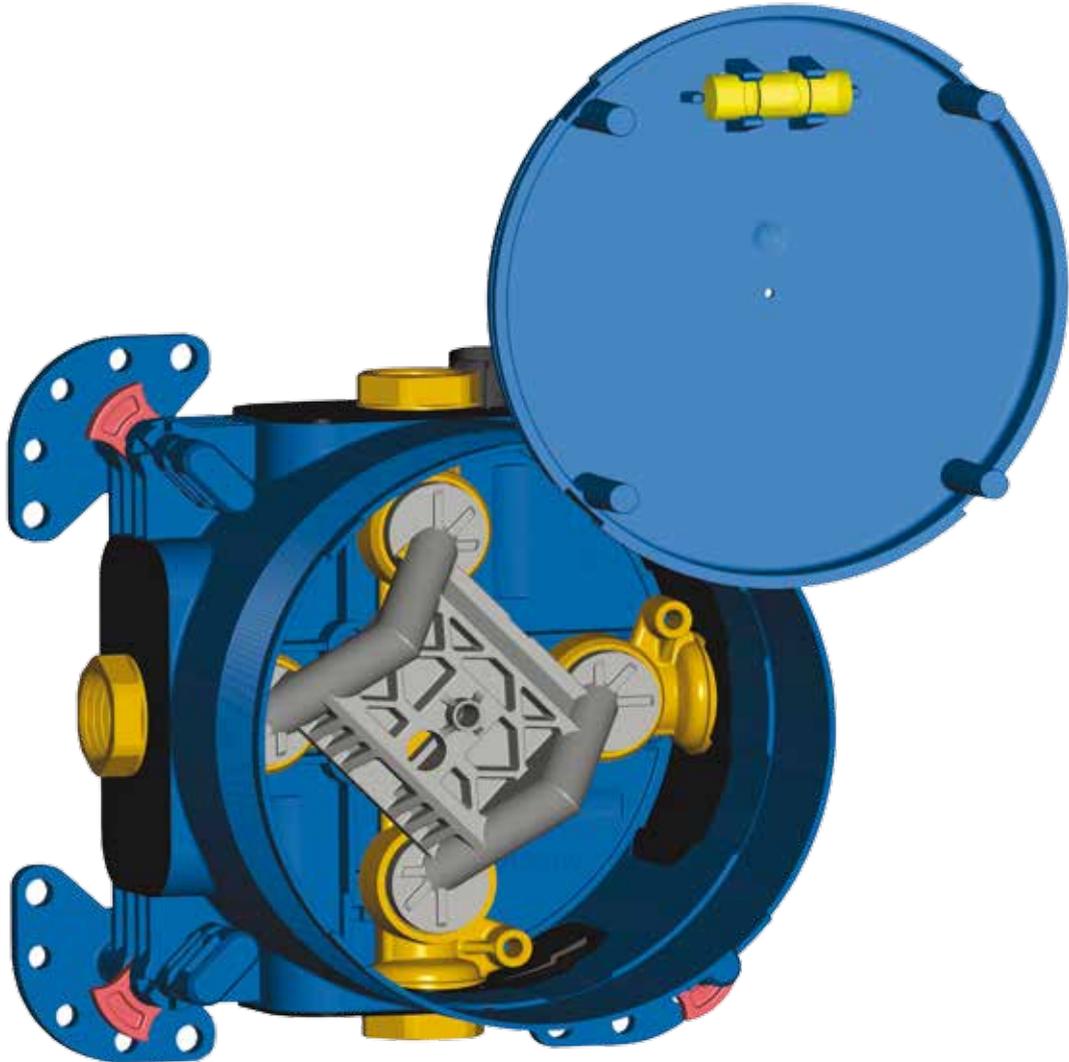

Ideal Standard has perfected its built-in installation technology in cooperation with a group of experts.* The new modular built-in EASY-Box leaves no room for further expectation. Thanks to its FAST-FIX mounting concept, installation is exceptionally easy and, above all, flexible. The DICHT-FIX waterproof system provides triple protection against water penetration both internally and externally, ensuring optimum sealing against damp. Choose between a single-lever mixer and a thermostat. Also available as an intrinsic safety version according to DIN EN 1717 standards (protection against pollution of

drinking water systems) with a bathtub outlet safety device.**

It also meets DIN 4109 (sound insulation in high-rise buildings) noise control category I standards.

Complies with the following norms and directives:


- DIN 4109 sound insulation in high-rise buildings, noise control category I.
- DIN 1988-compliant pipe flushing.
- Protects brickwork from damp.
- DIN EN 1717 with intrinsic safety models.**

* Ideal Standard would like to thank all the experts and trade professionals who actively supported the development of EASY-Box.

** Only in conjunction with Ideal Standard connections.

Kit 1

Flexible basic built-in unit.
The small basic built-in unit is extremely flexible and adapts to all types of installation. Installation is effortless and requires no special tools. Bath/shower fittings and single thermostats can be mounted on the basic unit.

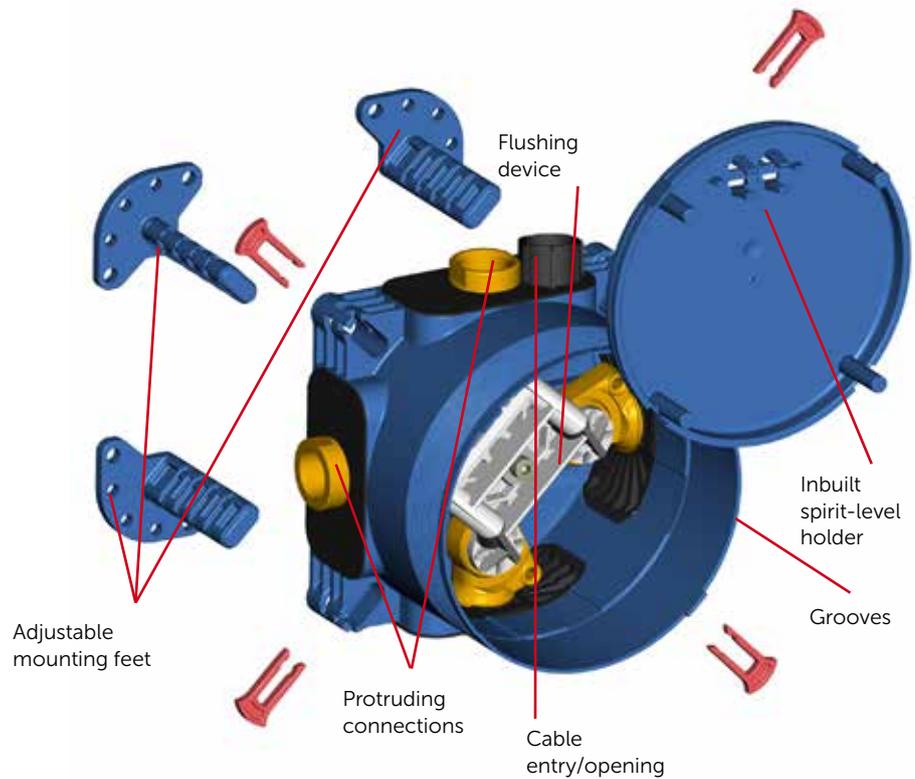

Kit 2

Kit 2 consists of a function built-in unit and visible design parts.

Function built-in unit: features technology specific to each model. Cartridge, switching device, check valve, shut-off device (inbuilt on thermostats, optional on single-lever mixers) and inbuilt gaskets - this unit offers it all! Also available as an intrinsic safety version (only in conjunction with Ideal Standard connections).



Single Lever Shower Mixer with/featuring the Click cartridge with HWTC, water saving ECO-function and DICHT-FIX system



Single Lever Bath&Shower Mixer with/featuring the Click cartridge with HWTC, water saving ECO-function and DICHT-FIX system



Thermostatic Mixer for shower reliable/durable thermostatic cartridge, shut-off device, check valve and DICHT-fiX



Thermostatic Mixer for Bath & Shower reliable/durable thermostatic cartridge, shut-off device, check valve and DICHT-fix system



Visible design parts: stylish fittings ranges. The function built-in units can be combined with more than 30 fittings, offering total flexibility in design choice.



Shower single lever



Bath&Shower single lever



Thermostatic Shower




Thermostatic Bath&Shower

FAST-FIX

The innovative fixation concept

FAST-FIX fixation concept ensures simple, effortless installation in every mounting possibility.

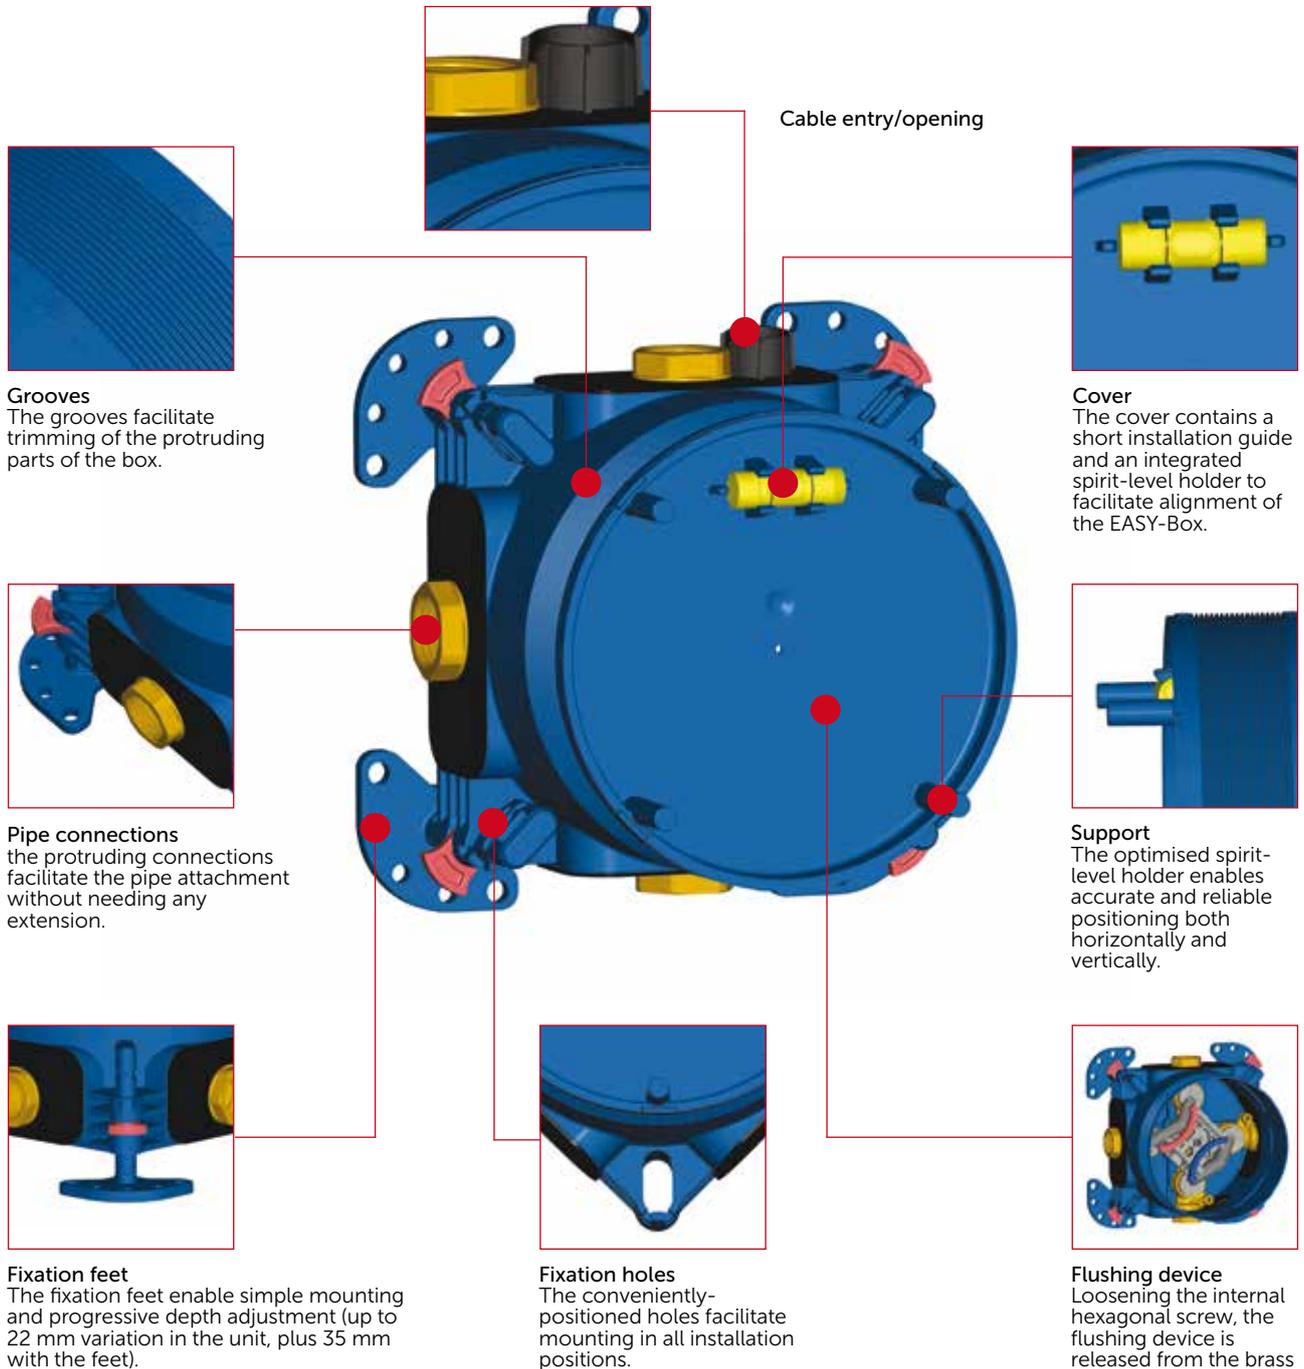

Installation possibilities



1. In-wall installation.



2. On-wall installation.



3. In-front-of-wall installation.



4. Installation on pre-carrier systems.




5. Installation on prefabricated cells.


DICHT-FIX

100% waterproof


The time-tested DICHT-FIX waterproof system has been further developed and now provides triple sealing for concealed units.

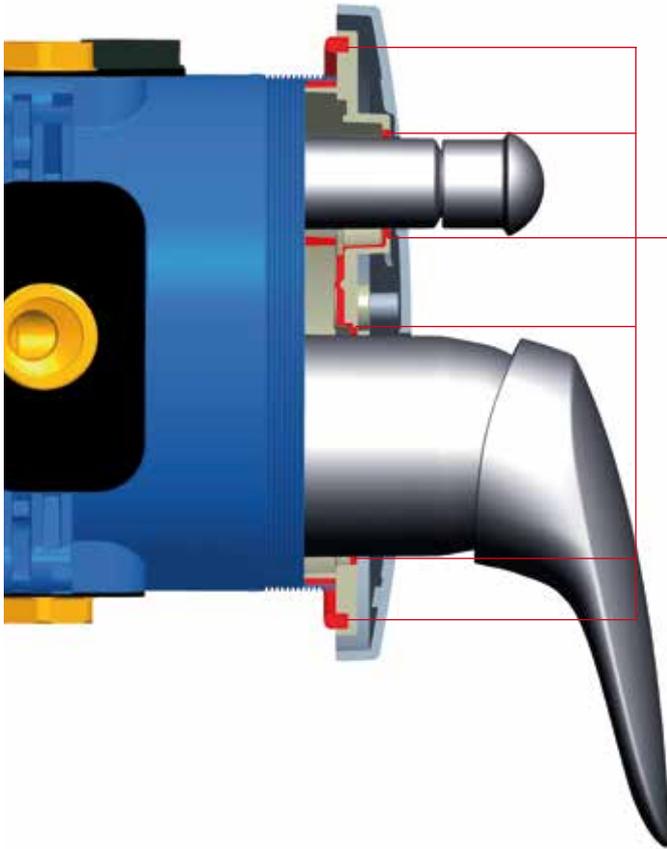

External waterproof – protection against splashing: the plate support protects the EASY-Box externally from splashing water. All openings are individually and reliably sealed.



External waterproof – sealing fleece: the sealing fabric replaces the former sealing frames and prevents water from soaking in.



Internal waterproof - inlays: additional sealings around the protruding pipes prevent any water from soaking from the EASY-Box into the wall.



Intelligent solution – squirted sealings: the plate support is manufactured in a 2-component die-casting process. Direct injection moulding ensures that the joints remain perfectly watertight.

Structure sealant



EASY-Box enables carefree showering enjoyment!

The most important issue, particularly for built-in installations, is to ensure that the brickwork is well sealed against water and dampness. When showering, no water should penetrate the wall e.g. through the gaps between the tiles. Therefore, the relatively large openings in the wall which hold the built-in unit's technology must be particularly well sealed.

Fast Installation:



On-wall installation. Connect the pipes.




Fix sealing fabric on ready plastered and pre-treated wall.



Rinse pipes using a pre-assembled flushing device.



Trim the protruding part of the box, turn off the water and disassemble the flushing device.



Assemble the function unit (thermostat or single lever body) from Kit 2 and verify watertightness.



Slide the plate support over the cartridge and the diverter and screw into the right position. Then mount the visible design parts.





READY! EASY-Box combines modern design with advanced technology!

Various installation schemes

Easy Box has been developed by experts aiming to make installation easy even with the most complex schemes. The following installation examples show exactly this.

One Outlet Installation

The installation with a single lever and a thermostatic shower mixer is extremely easy. The unused outlet needs to be closed off with a plug included in the set. The flushing device is removed after carrying out the flushing of the installation. The functional part and decorative elements are then to be installed.

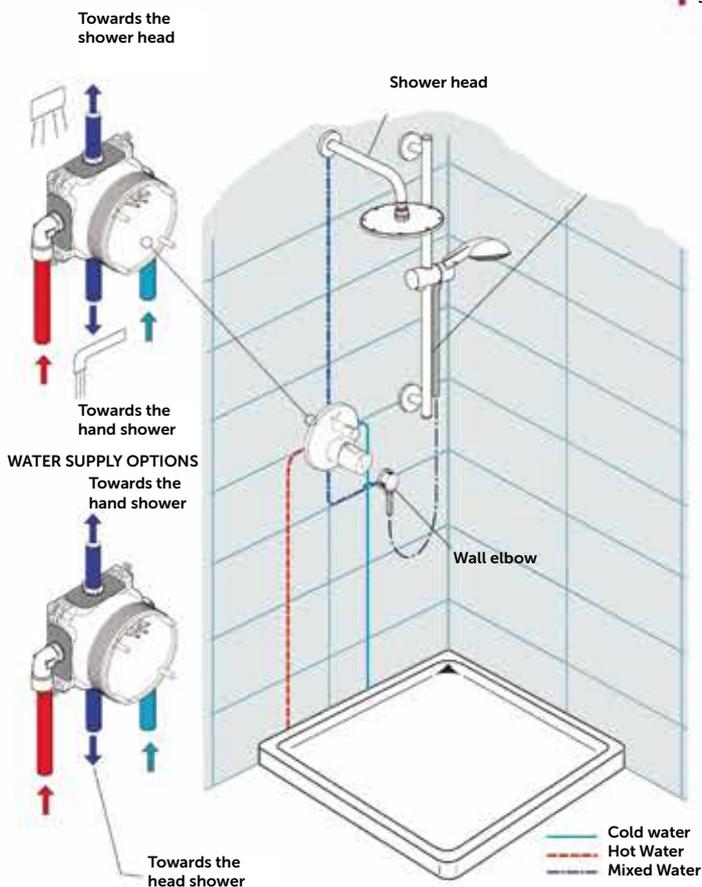
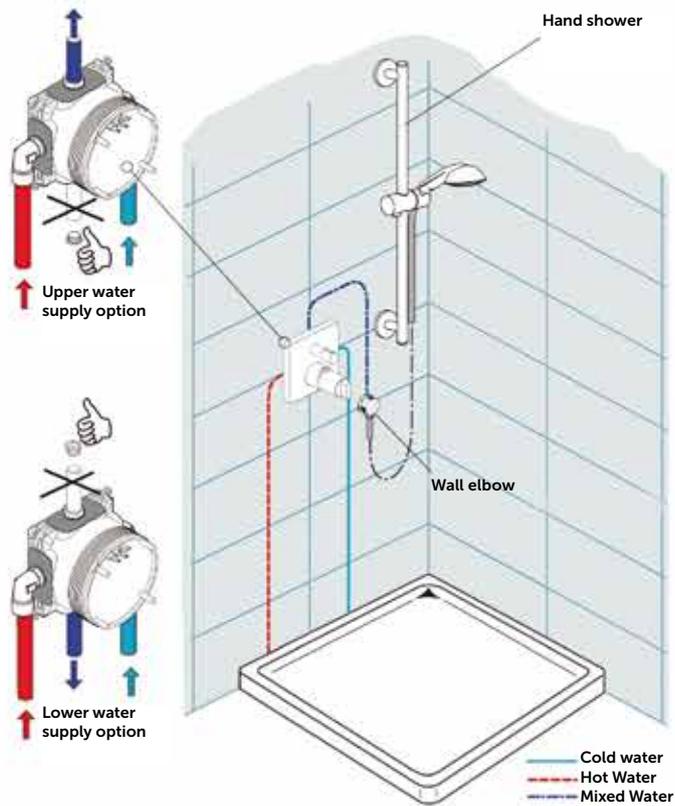


Two Outlet Installation

The installation with two mixed water outlets uses single-lever or thermostatic bathtub/shower mixer with a diverter which allows the water to switch to one of the two outlets.

Two Outlet Installation in combination with Multiplex Trio siphon

The installation with two water outlets using single-lever or thermostatic bathtub / shower mixer with a diverter which allows the water to switch to one of the two outlets.

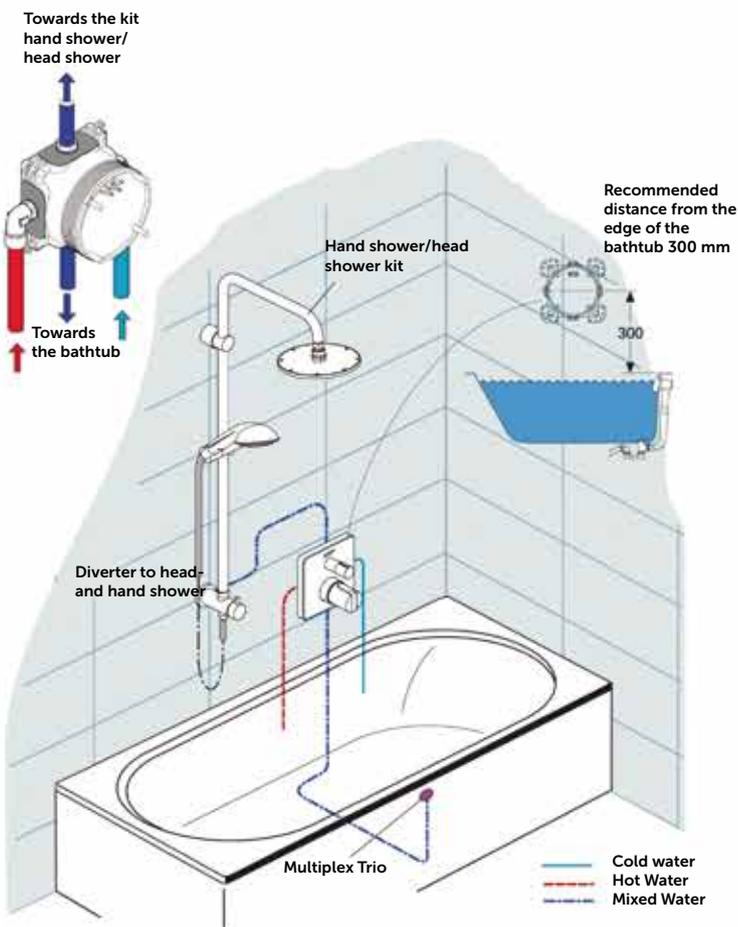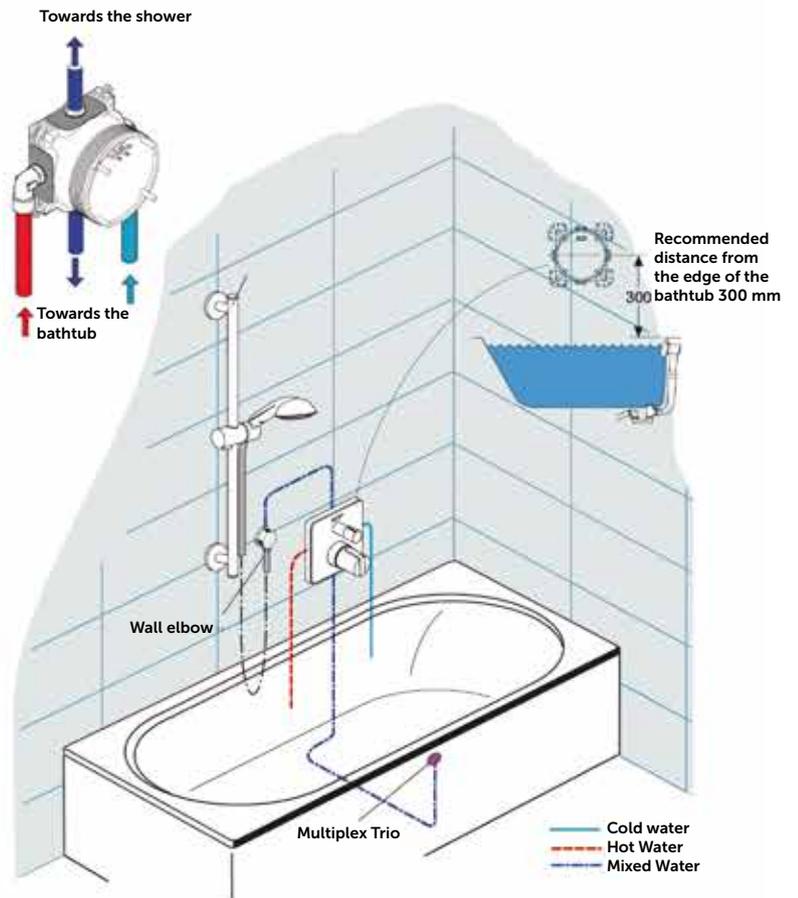


Installation in combination with Multiplex Trio siphon and a built-in shower system

The installation with two water outlets using single-lever or thermostatic bathtub / shower mixer is used to power up the built in bath&shower system. The switching to the head and hand shower is made from the two-way ceramic diverter of the shower system.



Variable installation depth

Between 73 and 95 mm


The Kit can be adapted to various depths without any difficulty. Additional depth adjustment (5 – 40 mm) is possible thanks to the variable height adjuster. For excessively deep installations, special distance frames and extension sets are available.

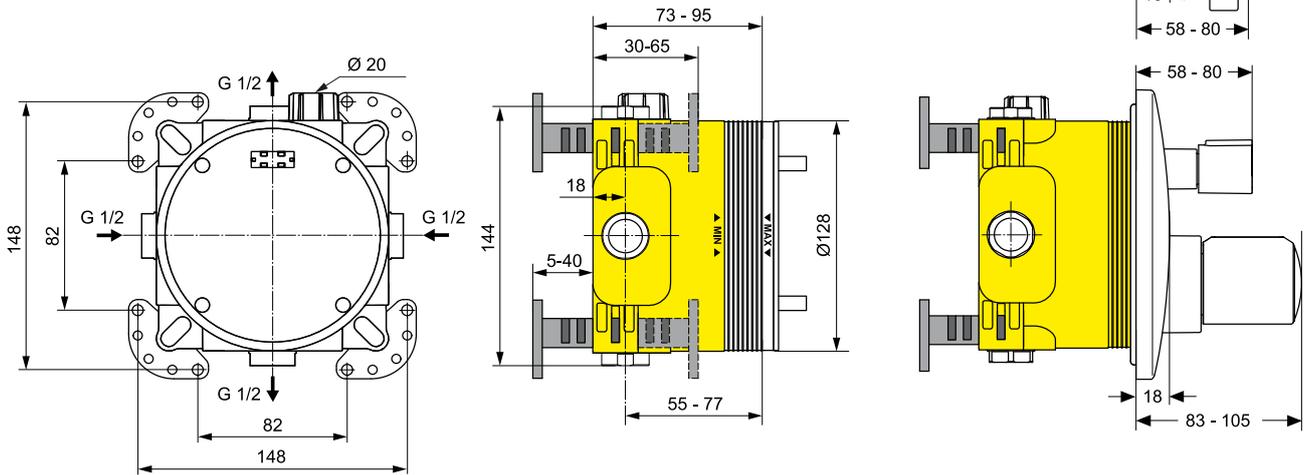


Flow rate

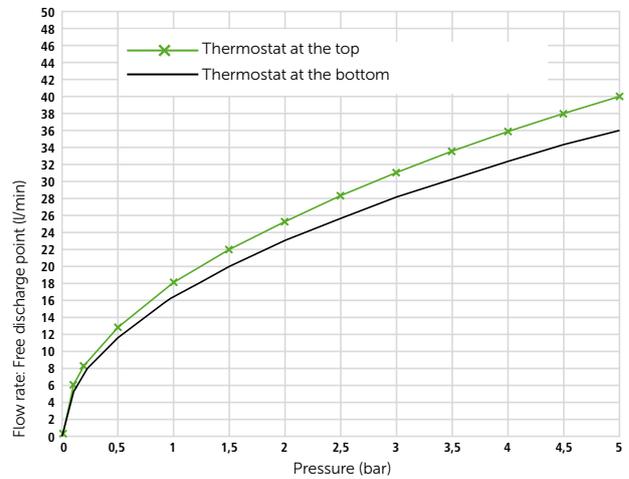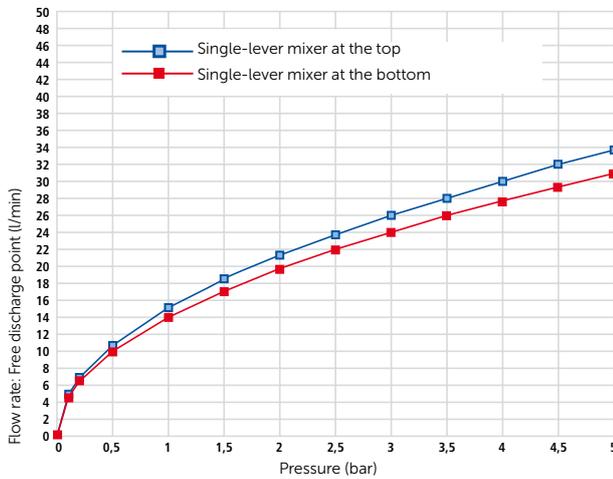


Accessories




Intrinsic safety model variants:
or item code number
see model overview.



Shut-off devices for
single-lever mixers:
A960706NU



Cartridge for inverted
connections:
EHM: A963462NU
Thermostat: A963606NU



Distance frame for
installations which
are too flat:
A960705AA



Extension set for
installations which
are too deep:
A960704NU

Unlimited possibilities

The Ideal Standard EASY-Box concept is continuously being expanded and is the universal built-in solution for the future. It can be combined with more than 30 different fittings for maximum flexibility.

Kit 1 - EASY-Box
Basic built-in unit for wall installation:

G1/2 protruding connections, 4 height adjusters with locking devices (FAST-FIX), 1 flushing block and 1 stopper, sealing fleece, assembly instructions.



A1000NU

Complies with the following norms and directives:
 DIN 4109 sound insulation in buildings, noise control category I.
 DIN 1988 flushing of pipes in compliance with standards.
 Protects brickwork from damp.
 DIN EN 1717 with intrinsic safety models.*

Kit 2 - Function Built-in unit: for thermostatic cartridge, side valves for pre-shut off with non return valve, DICHT-FIX system and visible design parts for shower and bath&shower.

Thermostatic Shower mixers



Melange
A4721AA



Tonic II
A6344AA



Ceratherm 200 New
A4662AA



Ceratherm 100 New
A4659AA

Thermostatic Bath&Shower mixers



Melange
A4891AA



Tonic II
A6345AA



Ceratherm 200 New
A5620AA



Ceratherm 100 New
A4888AA

Electronic mixers



Ceraplus
A6147AA, A6148AA
A6151AA, A6152AA



Ceraplus
A6149AA, A6150AA
A6153AA, A6154AA



Ceraplus
A6155AA
A6156AA



Ceraplus
A6157AA
A6158AA

* Only in conjunction with Ideal Standard connections.
 ** Intrinsic safety models according to DIN EN 1717 standards.

Kit 2 - Functional built-in unit for single-lever mixers. Choose between a bath and shower or shower fitting with CLICK-cartridge, hot water temperature control, ECO-function and DICHT-FIX.

Built-in Shower mixers



Melange
A4719AA



Connect Blue
A5801AA



Tonic II
A6339AA



Tesi
A6585AA



Strada
A5852AA



Active
B8651AA



Ceramix Blue
A5666AA



Ceraplus
B8653AA



Attitude
A4757AA



Cerasprint
A5724AA



Gio
A6278AA



Ceraplan
A6114AA



Vito
A6064AA

Built-in Bath&Shower mixers



Melange
A4720AA



Connect Blue
A5802AA



Tonic II
A6340AA



Tesi
A6586AA



Strada
A5853AA



Active
B8652AA



Ceramix Blue
A5664AA



Ceraplus
B8654AA



Attitude
A4758AA



Cerasprint
A5723AA



Gio
A6276AA



Ceraplan III
A6115AA



Vito
A6065AA



Ideal Standard-Vidima AD

53 Marin Popov Street
5400 Sevlievo, Bulgaria
Tel: +359 675 30362
office@idealstandard.com

Representative office, Riga

A. Briana str. 9a,
Riga, LV- 1001, Latvia
Tel: +371 673 57 792
Fax: +371 673 57 795
vdorogoi@idealstandard.com

Representative Office, Bucharest

Cotroceni Business Center
Bd. Iuliu Maniu, nr 7, corp T,
Floor 2, office A1, Sector 6
061072 Bucharest, Romania
Tel/Fax: +40 21 322 3201
Tel/Fax: +40 21 322 3202
officebucharest@idealstandard.com

Ideal Standard Polska Sp. z o.o.

Ul. Ostrowskiego 7,
53-238 Wrocław, Poland
Tel. +48 71 78 68 301
Fax. +48 71 78 68 303
dzialhandlowy@idealstandard.pl

Representative office, Belgrade

Drinčićeva no.19, apartment no.8
11000 Belgrade, Serbia
Tel/Fax: + 381 11 7138 058
+ 381 11 7138 059
obelgrade@idealstandard.com

Representative Office, Budapest

IS-Hun Kft
1221 Budapest, Hungary
Aranyfácán u 20
Tel: + 36 30 6991 594
zgarai@idealstandard.com

Contact for Croatia

Mobile: +38591 22 99 304
hpavicic@idealstandard.com

Contact for Slovenia

Tel: +39 040 2158058
info@liaison.it

Contact for Albania, Kosovo

and Bosnia & Herzegovina
Tel: +359 887709696
imichev@idealstandard.com

