

Design right down the line



The New *Linearis Comfort* Shower Channel



Quality
Safety
Success

Product advantages

NEW Linearis Comfort Shower Channel

Accessories


- Multistop** –
Odour, foam, rodent and insect stop
- Hair filter**



Tipp: Minimum installation depth for bathroom renovation

Shower channel,
System 125
Linearis Comfort

93
mm



Waterproofing flange height **only 85 mm!**


- Stainless steel rim can also be reversed and tiled.**



- Exemplary hygiene** –
smooth, easy-clean surface,
self-cleaning effect




- Channel lengths:** 750 mm, 850 mm, 950 mm,
1050 mm, 1150 mm.

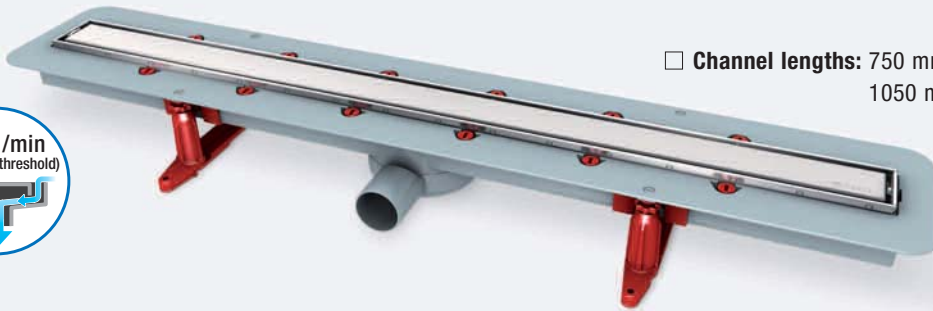

- Installation on room or wall side of shower**

Feet can be pivoted away as required for wall-side installation.

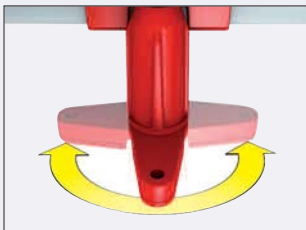

- Suitable for natural stone floor coverings**
up to 20 mm.

- Channel locking mechanism as standard**
All Linearis Comfort channels offer a lockable channel cover.

- Vertically adjustable frame**
Stainless steel channel and rim can be adjusted from 7-22 mm to meet on site tile/granite/marble thicknesses.



Design
**right down
the line**



LSH DESIGN PLUS

design channel Light



design channel Crystal



Linearis Comfort Shower Channels – System 125

Illustration	Description	Channel length	Art. #	Units/Box./Pal.
<p>NEW</p>  <p>Including installation supports</p>	<p>Linearis Comfort shower channel With drain body made of ABS, Ø 50, lateral outlet With odour trap, water sealing height 22 mm <input type="checkbox"/> with cover and frame made of stainless steel (removable channel can also be reversed and tiled on recessed side), Class K 3</p> <p>Flow rate 60 l/min without threshold, 63 l/min 10 mm threshold</p>	750 mm 850 mm 950 mm 1050 mm 1150 mm	45 600.83 45 600.84 45 600.85 45 600.86 45 600.87	1/21 1/21 1/21 1/21 1/21
	<p>Multistop Odour, foam, rodent and insect stop</p>		48 400	1/-
	<p>Hair filter made of polymer</p>		48 800	10/-
	<p>Installation aid used instead of backfilling with concrete/screed. Includes installation adhesive</p> <p><input type="checkbox"/> Linearis Comfort installation aid suitable for all lengths, can be shortened as required</p>	-	48 640	1/-
<p>NEW</p> 	<p>Sealing sleeve as a seal underneath ceramic floor coverings, made of modified polyethylene membrane with fleece on both sides and a cutting template printed on, suitable for all channel lengths, including installation adhesive</p>	-	48 638	1/-

KesselDesign

by  KESSEL



KESSEL AG · Bahnhofstraße 31 · 85101 Lenting · Germany

www.kessel-design.com